

SCALE 1/1




Specification :

Material :

1. Housing : ABS, UL 94V-0, Outward Matt, Grey Color.
2. IDC
 - 2-1 IDC Housing : Polycarbonate, UL 94V-2, KRONE dual.
 - 2-2 IDC Terminal material & finished : Phosphor Bronze with 50-60 micro-inch Tin-Lead plated.
3. Molding Type : Narrow Molded, PVC 70P, Grey Color.
4. Cable : CAT.5e Unshielded Twisted Pair, 24AWG Stranded conductor, PVC Jacket with Grey Color.
5. RJ45 Plug :
 - 5-1. Housing & Insert : Polycarbonate, UL 94V-2, Transparence color.
 - 5-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 5-3. Contact finished : min. 50 micro-inch Gold plated on contact area.

Wiring information							
PLUG T568B				KEYSTONE T568B			
COLOR CODE				COLOR CODE			
WHITE/ORANG	PIN.1	---	---	PIN.1	WHITE/ORANGE		
ORANG	PIN.2	---	---	PIN.2	ORANGE		
WHITE/GREEN	PIN.3	---	---	PIN.3	WHITE/GREEN		
BLUE	PIN.4	---	---	PIN.4	BLUE		
WHITE/BLUE	PIN.5	---	---	PIN.5	WHITE/BLUE		
GREEN	PIN.6	---	---	PIN.6	GREEN		
WHITE/BROWN	PIN.7	---	---	PIN.7	WHITE/BROWN		
BROWN	PIN.8	---	---	PIN.8	BROWN		

Part No.	Length	Part No.	Length
1963-0.5	0.5M	1963-8	8M
1963-1	1M	1963-10	10M
1963-2	2M	1963-15	15M
1963-3	3M	1963-20	20M
1963-5	5M	1963-30	30M

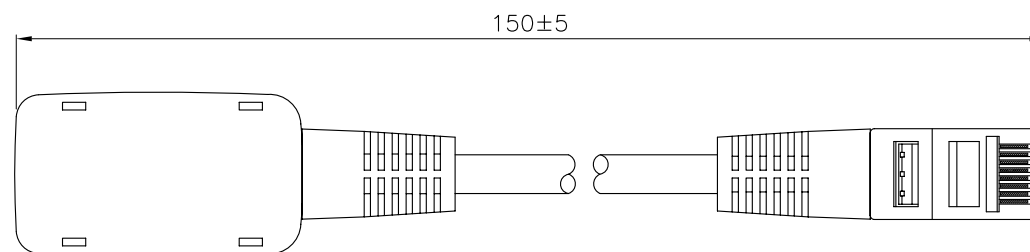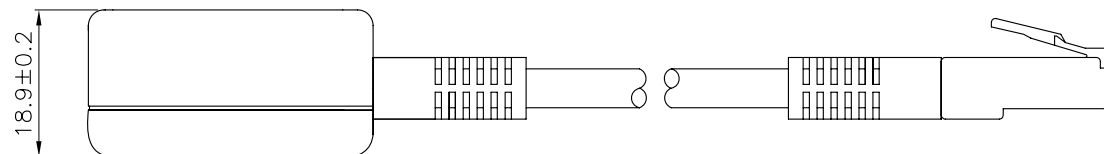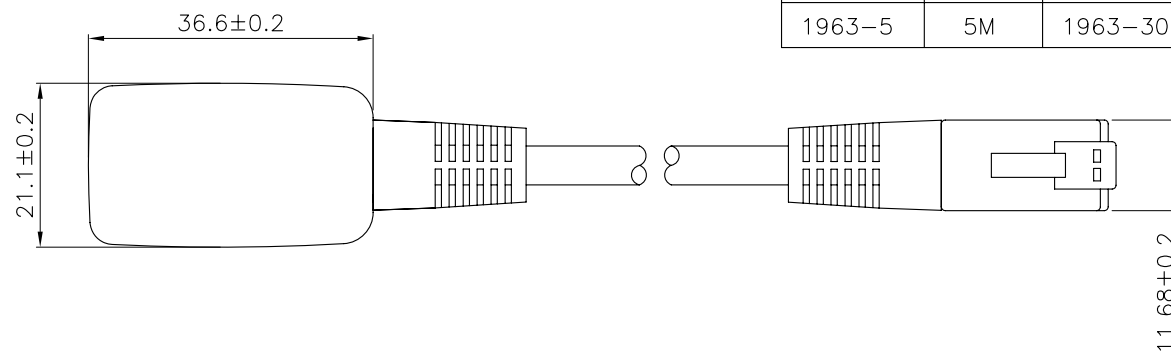

RoHS Compliant

	DSGN	CSQ	01.JUN.2007	ITEM NO: 1963
	CHK	Maer	01.JUN.2007	
	APPR	Yty	01.JUN.2007	CAT.5E Adaptor, Male to Female
UNIT M/M	Videk Ltd			
SCALE 1/1				
DWG NO: 1963				